



## Capacitive sensors Series 70 - NPN - StEx - ATEX

Series 80 - PNP - StEx - ATEX

Housing  $\varnothing$  26 mm / G 1" / 40 mm

- For use in areas with the risk of dust explosion, zone 20
- For use in areas with the risk of gas explosion, zone 1
- Housing material PTFE
- Sensing distance 0...20 mm adjustable
- Suitable for food and pharmaceutical applications
- With flange, sealing can be made with a gasket or PTFE-tape (not supplied with the sensor).

DMT 01 ATEX E 157	IEEx BVS 07.0015
Ex II 2 G Ex mb IIC T4 Gb	Ex mb IIC T4 Gb
Ex II 1/2 D Ex ta/tb IIIC T101°C Da/Db	Ex ta/tb IIIC T101°C Da/Db










Quattro<sup>EX</sup>Protect™

### Technical data

Non-flush mountable

Operating distance $S_n$	5 mm
Operating distance min. / max. adjustable	0...20 mm
Electrical version	4-wire DC
Output function	Antivalent
<b>Type NPN</b>	<b>KAS-70-26-A-K-G1"-PTFE-StEx</b>
<b>Art.-No.</b>	<b>KA 0824</b>
Connection diagram No.	3
<b>Type PNP</b>	<b>KAS-80-26-A-K-G1"-PTFE-StEx</b>
<b>Art.-No.</b>	<b>KA 0264</b>
Connection diagram No.	6
Operating voltage ( $U_b$ )	10...30 V DC
Output current max. ( $I_o$ )	2 x 150 mA
Voltage drop max. ( $U_o$ )	$\leq$ 2.0 V
Permitted residual ripple max.	10 %
No-load current ( $I_o$ )	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-20...+90 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 4 x 0.5 mm <sup>2</sup>
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PC (FDA 21 CFR 177.1580)
Media optimized	Yes

\* With sealed potentiometer screw

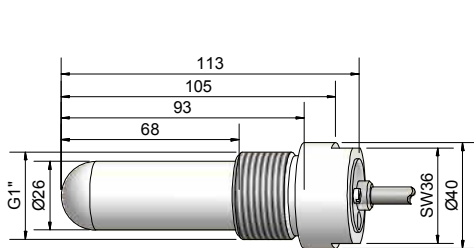

Made in Germany