



Capacitive Sensors Series 90 - AC / DC

Housing M 32 x 1,5



- Housing material: Brass
- Sensing distance 2...20 mm adjustable

Certificate:



Technical data	Flush mountable
Operating distance S_n	15 mm
Operating distance min. / max. adjustable	2...20 mm
Electrical version	2-wire AC / DC
Output function	Normally closed (NC)
Type	KAS-90-30-Ö-M32-PTFE/MS
Art.-No.	KA 0298
Operating voltage (U_B)	20...250 V AC / DC
Output current max. (I_o)	330 mA
Load current min.	5 mA
Voltage drop max. (U_o)	≤ 6 V
No-load current (I_o)	Typ. 2.5 mA
Frequency of operating cycles max.	25 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 3 x 0.75 mm ²
Housing material	Brass
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO

All specifications are subject to change without notice. (22.03.2010)

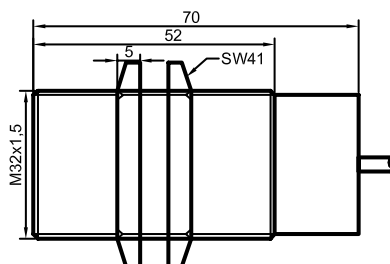

Made in Germany