



## Capacitive Sensors Series 80 - PNP



Housing M 12 x 1

- Housing material: PTFE
- Ideal for detection of chemically aggressive media
- Also suitable for food applications
- Sensing distance 0.5...10 mm adjustable








Certificate:



Technical data	Non-flush mountable
Operating distance $S_n$	4 mm
Operating distance min. / max. adjustable	0.5...10 mm
Electrical version	4-wire DC
Output function	Antivalent
<b>Type NPN</b>	
<b>Art.-No.</b>	
Connection diagram No.	
<b>Type PNP</b>	
<b>KAS-80-A22-A-K-PTFE</b>	
<b>Art.-No.</b>	
<b>800 745</b>	
Connection diagram No.	
6	
Operating voltage ( $U_b$ )	10...35 V DC
Output current max. ( $I_e$ )	2 x 250 mA
Voltage drop max. ( $U_d$ )	≤ 2.0 V
Permitted residual ripple max.	10%
No-load current ( $I_o$ )	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PUR, 4 x 0.14 mm <sup>2</sup>
Housing material	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO
Media optimized	Yes
<b>Accessories (is delivered with the sensor)</b>	
2 pieces nuts M 12	

All specifications are subject to change without notice. (06/2014)

\* With sealed potentiometer screw

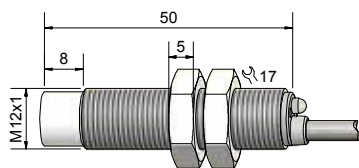

Made in Germany