



## ■-L&V&L Capacitive Filling Level Probe - KFI 1 Limit value switching point

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Automatic identification of NPN / PNP function
- Probe length max. 2000 mm



### Technical data




Active zones [M]	320 mm
Electrical version	4 - wire DC
Output function	1 limit value switching point, normally open
<b>Type</b>	<b>KFI-5-1-500-320-S-GFK-TB50-ETW</b>
<b>Art.-No.</b>	<b>KI 0068</b>
Operating voltage (U <sub>B</sub> )	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
Permitted ambient temperature	-25...+200 °C (IB1, M, IB2)
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm <sup>2</sup>
Housing material	GFK
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)

**Accessories** for mounting (is not delivered with the probe) please see our selection of accessories.


\*Where applicable

#### EasyTeach chart:

LED green / Adjustment function



Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.

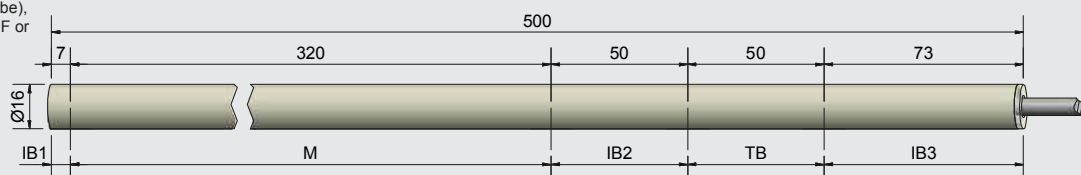

Made in Germany

All specifications are subject to change without notice. (11/2014)