



Capacitive Sensors

Series 80 - PNP

Housing $\varnothing = 26\text{mm} / 1'' / 40\text{mm}$


- Housing material PTFE
- Useable for an ambient temperature up to $+100^\circ\text{C}$
- Ideal of detection of chemically aggressive media
- Suitable for foods and pharmaceutical applications
- Special version with flange. Sealing can be made with a gasket or PTFE-tape (not supplied with the sensor)

Certificate:



Technical data	Non-flush mountable
Operating distance S_n	5 mm
Operating distance min./max. adjustable	0...20 mm
Electrical version	4-wire DC
Output	Antivalent (NO + NC)
Type NPN	
Art.-No.	
Connection diagram No..	
Type PNP	KAS-80-26-A-PTFE-1''-100°C
Art.-No.	KA 0277
Connection diagram No.	6
Operating voltage (U_B)	10...35 V DC
Output current max. (I_o)	2 x 250 mA
Load current min.	-
Voltage drop max. (U_d)	$\leq 2.0\text{ V}$
Permitted residual ripple max.	10%
No-load current (I_o)	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	$-25...+100^\circ\text{C} / \text{CIP } 121^\circ\text{C}$
LED-display	Green/yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 4 x 0.5 mm ²
Housing material	PTFE
Active surface	PTFE
Lid	PA

All specifications are subject to change without notice. (21.03.2007)

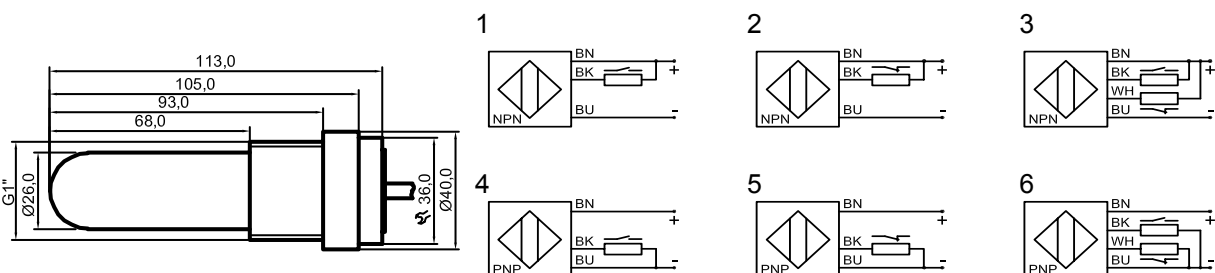

Made in Germany