



Capacitive Sensors Series 80 - PNP



Housing M 30 x 1.5


- Housing material: PA / PPO
- Sensing distance 1...30 mm adjustable




Certificate:

Technical data	Non-flush mountable
Operating distance S_n	15 mm
Operating distance min. / max. adjustable	1...30 mm
Electrical version	4-wire DC
Output function	Antivalent
Type NPN	
Art.-No.	
Connection diagram No.	
Type PNP	
KAS-80-A24-A-K	
Art.-No.	
808 400	
Connection diagram No.	
6	
Operating voltage (U_B)	10...35 V DC
Output current max. (I_o)	2 x 250 mA
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	10 %
No-load current (I_o)	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 529	IP 67*
Norm	EN 60947-5-2
Connection cable	2 m, PVC, 4 x 0.5 mm ²
Housing material	PA / PPO
Active surface	PA / PPO
Lid	PA / PPO
Media optimized	Yes
Accessories (is delivered with the sensor)	
2 pieces nuts M 30	


* With sealed potentiometer screw

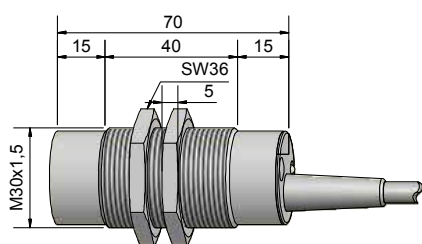


1




2




3




4



5



6



Made in Germany

All specifications are subject to change without notice. (06/2014)