



Capacitive Sensors Series 70 - NPN Series 80 - PNP

Housing M 32 x 1.5

- Housing material: Stainless steel VA
- Sensing distance 1...40 mm adjustable








Certificate:



Quattro^{EC}Protect™

Technical data	Non-flush mountable	Non-flush mountable
Operating distance S_n	25 mm	25 mm
Operating distance min. / max. adjustable	1...40 mm	1...40 mm
Electrical version	3-wire DC	4-wire DC
Output function	Normally open (NO)	Antivalent (NO + NC)
Type NPN	KAS-70-34-S-M32-PTFE/V2A	KAS-70-34-A-M32-PTFE/V2A
Art.-No.	718 600	KA 0041
Connection diagram No.	1	3
Type PNP	KAS-80-34-S-M32-PTFE/V2A	KAS-80-34-A-M32-PTFE/V2A
Art.-No.	818 600	818 540
Connection diagram No.	4	6
Operating voltage (U_b)	10...35 V DC	10...35 V DC
Output current max. (I_o)	250 mA	2 x 250 mA
Voltage drop max. (U_o)	≤ 2,0 V	≤ 2,0 V
Permitted residual ripple max.	10 %	10 %
No-load current (I_o)	Typ. 15 mA	Typ. 15 mA
Frequency of operating cycles max.	50 Hz	50 Hz
Permitted ambient temperature	-25...+70 °C	-25...+70 °C
LED-display	Green / yellow	Green / yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 67	IP 67
Norm	EN 60947-5-2	EN 60947-5-2
Connection cable	2 m, PVC, 3 x 0.75 mm ²	2 m, PVC, 4 x 0.50 mm ²
Housing material	VA No. 1.4305	VA No. 1.4305
Active surface	PTFE (FDA 21 CFR 177.1550)	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO	PA / PPO
Media optimized	Yes	Yes

All specifications are subject to change without notice. (07/2011)

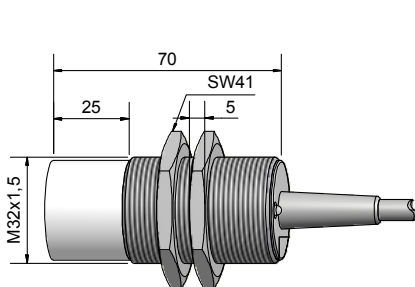

Made in Germany